


Low PIM 衰减器

Low PIM同轴衰减器主要用于测试和设备附件。上海图越能提供频率范围从DC到18GHz Low PIM衰减器，采用黄铜连接器，公头或母头可选， $PIM \leq -118dBc$ 。

命名规则

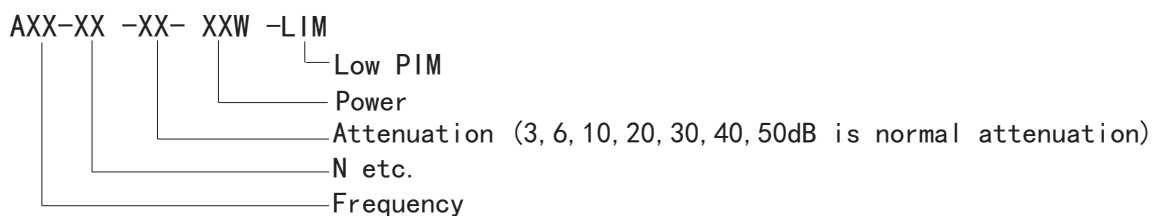

●型号：T18-Nx-XX-10W-LIM 平均功率：10W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AlO, BeO	N	Φ 30*49.5
DC-12.5	1.30	AlO, BeO	N	Φ 30*49.5
DC-18	1.40	AlO, BeO	N	Φ 30*49.5

●型号：T18-Nx-XX-50W-LIM 平均功率：50W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AlO, BeO	N	Φ 64*70
DC-12.5	1.30	AlO, BeO	N	Φ 64*70
DC-18	1.40	AlO, BeO	N	Φ 64*70

●型号：T18-Nx-XX-100W-LIM 平均功率：100W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AlO, BeO	N	Φ 64*121
DC-12.5	1.30	AlO, BeO	N	Φ 64*121
DC-18	1.40	AlO, BeO	N	Φ 64*121

●型号：T18-Nx-XX-200W-LIM 平均功率：200W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AlO, BeO	N	224*110*110
DC-12.5	1.30	AlO, BeO	N	224*110*110
DC-18	1.40	AlO, BeO	N	224*110*110