


Low PIM同轴负载

Low PIM负载主要用于测试和设备附件。上海图越能提供频率范围从DC到18GHz Low PIM负载，采用黄铜连接器，公头或母头可选， $PIM \leq -118dBc$ 。

命名规则

TXX-XXx-XXW-LIM

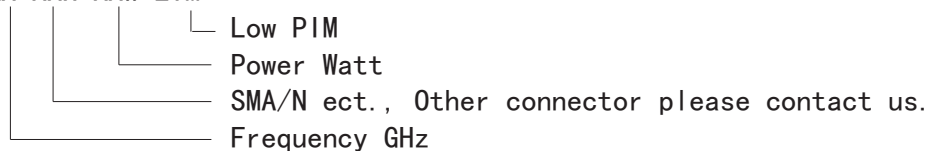

●型号：T18-Nx-10W-LIM 平均功率：10W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AL0, BeO	N	Φ 30*49.5
DC-12.5	1.30	AL0, BeO	N	Φ 30*49.5
DC-18	1.40	AL0, BeO	N	Φ 30*49.5

●型号：T18-Nx-50W-LIM 平均功率：50W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AL0, BeO	N	Φ 64*70
DC-12.5	1.30	AL0, BeO	N	Φ 64*70
DC-18	1.40	AL0, BeO	N	Φ 64*70

●型号：T18-Nx-100W-LIM 平均功率：100W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AL0, BeO	N	Φ 64*121
DC-12.5	1.30	AL0, BeO	N	Φ 64*121
DC-18	1.40	AL0, BeO	N	Φ 64*121

●型号：T18-Nx-200W-LIM 平均功率：200W



Fr. Range (GHz)	VSWR max.	Chip Material	Connector	Size (mm)
DC-8	1.20	AL0, BeO	N	224*110*110
DC-12.5	1.30	AL0, BeO	N	224*110*110
DC-18	1.40	AL0, BeO	N	224*110*110