


Cable Assemblies

Precision SMA Female / SMA Female SS226-SfSf-xxxx(T)

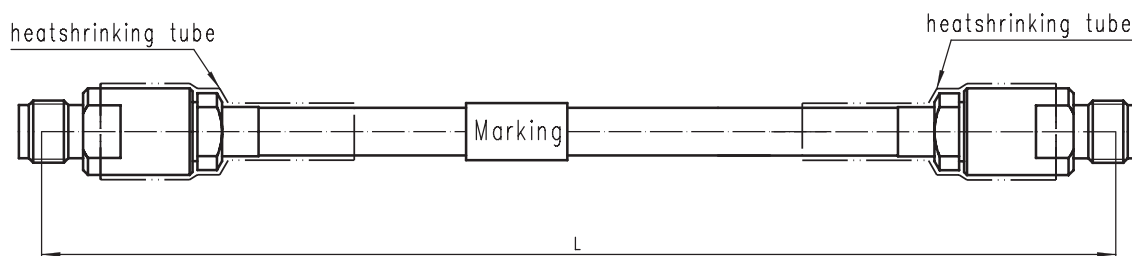

Available Varirants

TYPE	"L"(mm)	IL. dB@max.		Marking	Weight(g)
		18GHz	26.5GHz		
SS226-SfSf-500(T)	500	1.55	1.98	Tuyue YWWZZZ SS226-SfSf-500	34.5
SS226-SfSf-1000(T)	1000	2.56	3.27	Tuyue YWWZZZ SS226-SfSf-1000	59.0
SS226-SfSf-2000(T)	2000	4.80	6.20	Tuyue YWWZZZ SS226-SfSf-2000	108.0
SS226-SfSf-XXXX(T)	XXXX			Tuyue YWWZZZ SS226-SfSf-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: SMA-K141G
Connector right: SMA-K141G
Cable: SS402

Electrical data

Impedance	50 Ω
Frequency	DC to 26.5GHz
VSWR	≤ 1.20 , DC to 18GHz ≤ 1.25 , DC to 26.5GHz
Insertion loss	See table available variants
RF-leakage	≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 12.5 mm
Multiple: 38.1 mm
Jacket Diameter: 4.01mm

Environmental data

Temperature range	-55°C to +125°C
2002/95/EC (RoHS)	compliant