


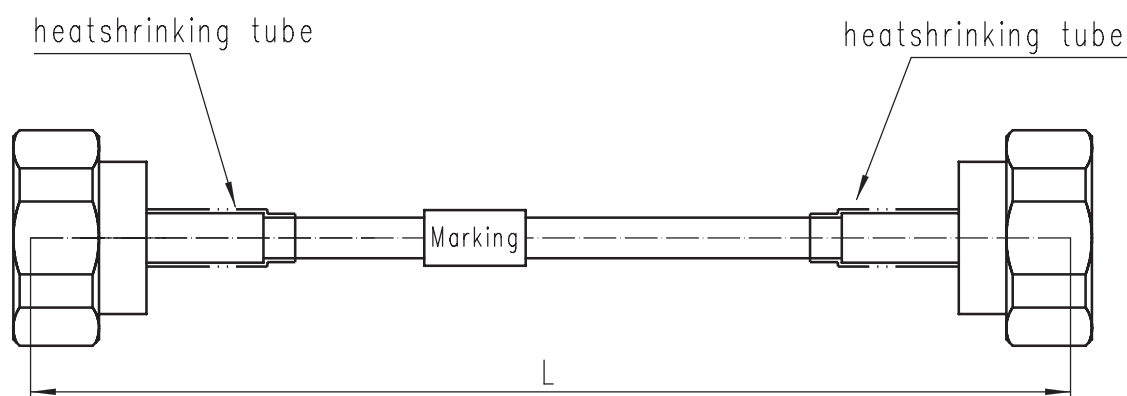

Available Varirants

TYPE	"L"(mm)	IL. dB@max. 8GHz	Marking	Weight (g)
THU8-DmDm-500	500	0.95	Tuyue YWWZZZ THU8-DmDm-500	180
THU8-DmDm-1000	1000	1.56	Tuyue YWWZZZ THU8-DmDm-100	214
THU8-DmDm-2000	2000	2.98	Tuyue YWWZZZ THU8-DmDm-2000	282
THU8-DmDm-XXXX	XXXX		Tuyue YWWZZZ THU8-DmDm-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: 7/16-J195G
Connector right: 7/16-J195G
Cable: 195

Electrical data

Impedance	50 Ω
Frequency	DC to 8GHz
VSWR	≤ 1.18 DC to 8GHz
Insertion loss	See table available variants
RF-leakage	≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 25.4 mm
Multiple: 101.6 mm
Jacket Diameter: 4.95mm

Environmental data

Temperature range	-55°C to +125°C
2002/95/EC (RoHS)	compliant