


Cable Assemblies Low Insertion Loss Precision SMA Male / SMA Male

BLU18A-SmSm-xxxx

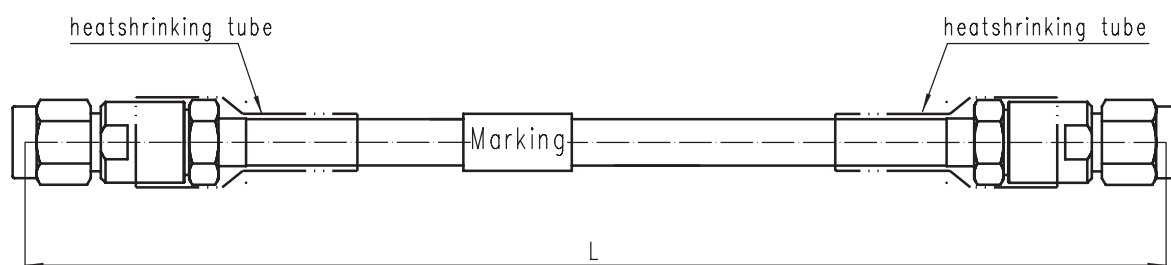

Available Varirants

TYPE	"L"(mm)	IL. dB@max 18GHz	Marking	Weight(g)
BLU18A-SmSm-500	500	0.79	Tuyue YWWZZZ BLU18A-SmSm-500	46
BLU18A-SmSm-1000	1000	1.28	Tuyue YWWZZZ BLU18A-SmSm-1000	82
BLU18A-SmSm-2000	2000	2.76	Tuyue YWWZZZ BLU18A-SmSm-2000	154
BLU18A-SmSm-XXXX	XXXX		Tuyue YWWZZZ BLU18A-SmSm-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: SMA-J210G
Connector right: SMA-J210G
Cable:210A

Electrical data

Impedance 50 Ω
Frequency DC to 26.5GHz
VSWR ≤ 1.27 , DC to 18GHz
Insertion loss See table available variants
RF-leakage ≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 12.5 mm
Multiple: 38.1 mm
Jacket Diameter: 5.5 mm

Environmental data

Temperature range -55°C to +125°C
2002/95/EC (RoHS) compliant

Shanghai Tuyue Electronics Co. Ltd.

Tel.: +86 21 64753655 Fax: +86 21 61257270
Email: info@tuyue.com.cn Website:www.tuyue.com.cn

Page
1 / 1