


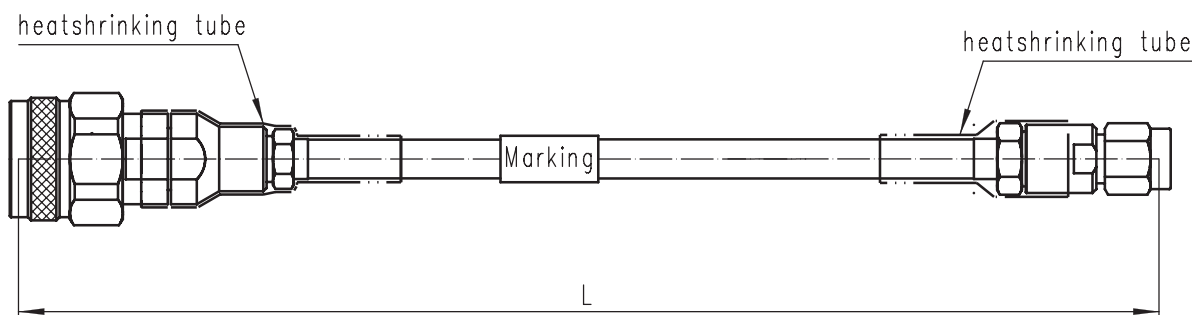

Available Varirants

TYPE	"L"(mm)	IL. dB@max 18GHz	Marking	Weight(g)
BLU18D-NmSm-1000	1000	0.89	Tuyue YWWZZZ BLU18D-NmSm-1000	185
BLU18D-NmSm-5000	5000	3.96	Tuyue YWWZZZ BLU18D-NmSm-5000	737
BLU18D-NmSm-10000	10000	7.70	Tuyue YWWZZZ BLU18D-NmSm-10000	1427
BLU18D-NmSm-XXXX	XXXX		Tuyue YWWZZZ BLU18D-NmSm-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: N-J50G
Connector right: SMA-J50G
Cable: 311A

Electrical data

Impedance	50 Ω
Frequency	DC to 18GHz
VSWR	≤ 1.30 , DC to 18GHz
Insertion loss	See table available variants
RF-leakage	≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 31.75 mm
Multiple: 76.2 mm
Jacket Diameter: 7.5 mm

Environmental data

Temperature range	-55°C to +125°C
2002/95/EC (RoHS)	compliant