


2.4mm In Series Adaptor


Main Specification		Material/Finishes	
Impedance	50Ω	Body	SUS303 / Passivated
Frequency	DC ~ 50GHz	Inner Contact	CuBe / Gold Plated
Durability	≥500 Cycles	Isulator	PEI
Operating Temp.	-60°C ~ +165°C		

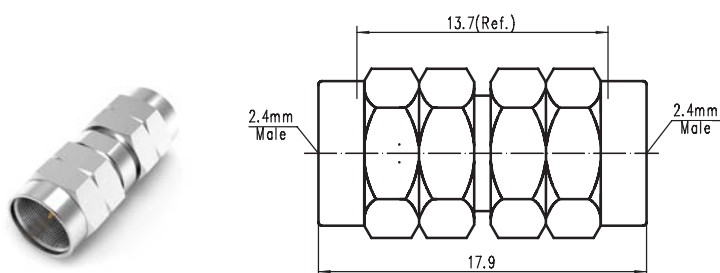

CODE: 100069

TYPE: 2.4mm - JJG


VSWR: DC - 50GHz...1.15 : 1(max)

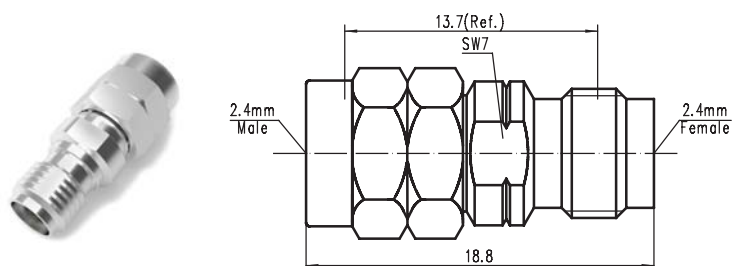

CODE: 100070

TYPE: 2.4mm - JKG


VSWR: DC - 50GHz...1.15 : 1(max)

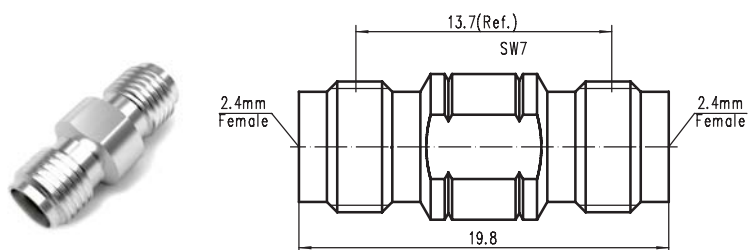

CODE: 100071

TYPE: 2.4mm - KKG

VSWR: DC - 50GHz...1.20 : 1(max)

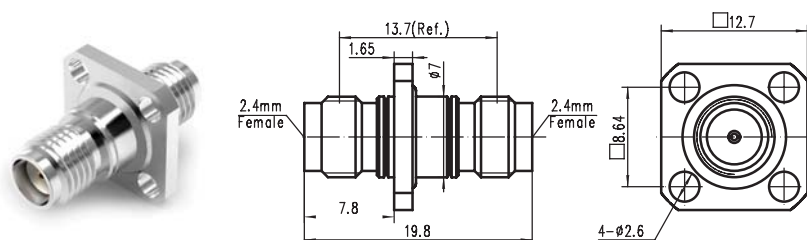

CODE: 100072

TYPE: 2.4mm - KFKG

VSWR: DC - 50GHz...1.20 : 1(max)