


Cable Assemblies Low Insertion Loss Precision 1.85mm M /1.85mm M **P67-18m18m-xxxxA2**

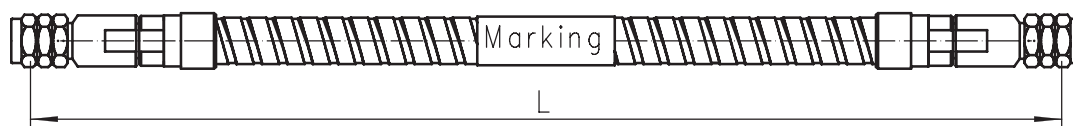

Available Varirants

TYPE	"L"(mm)	IL. dB@67GHz		Marking	Weight (g)
		Typ.	Max.		
P67-18m18m-500A2	500	3.38	3.99	Tuyue YWWZZZ P67-18m18m-500A2	66.5
P67-18m18m-1000A2	1000	6.37	6.89	Tuyue YWWZZZ P67-18m18m-1000A2	113.0
P67-18m18m-2000A2	2000	12.16	12.98	Tuyue YWWZZZ P67-18m18m-2000A2	216.0
P67-18m18m-XXXXA2	XXXX			Tuyue YWWZZZ P67-18m18m-XXXXA2	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: 1.85mm-J67G
Connector right: 1.85mm-J67G
Cable: P67
Armour: Stainless Steel Interlocked Hose, 8.4mm

Electrical data

Impedance	50 Ω
Frequency	DC to 67 GHz
VSWR	≤1.60, DC to 67 GHz
Insertion loss	See table available variants
RF-leakage	≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 28.6mm
Multiple: 58.6 mm

Environmental data

Temperature range	-55°C to +85°C
2002/95/EC (RoHS)	compliant