


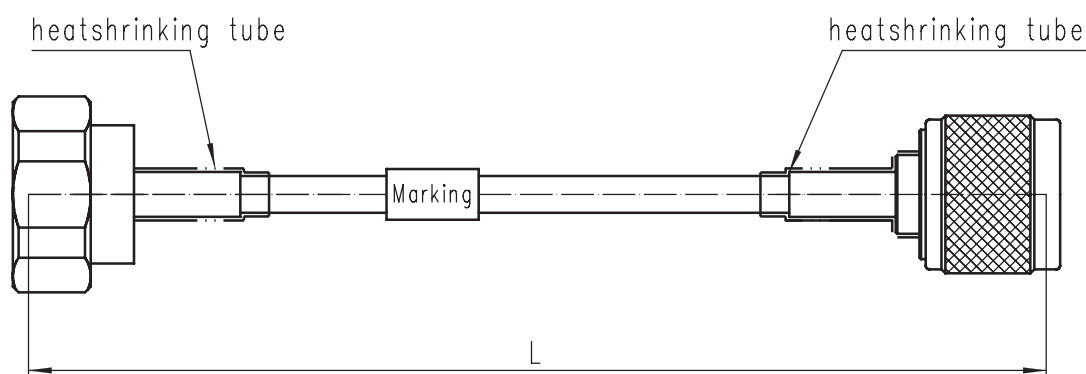

Available Varirants

TYPE	"L"(mm)	IL. dB@max.		Marking	Weight(g)
		3GHz	6GHz		
LIM23-DmNm-1000	1000	0.77	1.19	Tuyue YWWZZZ LIM23-DmNm-1000	139
LIM23-DmNm-1500	1500	1.10	1.70	Tuyue YWWZZZ LIM23-DmNm-1500	157
LIM23-DmNm-2000	2000	1.42	2.20	Tuyue YWWZZZ LIM23-DmNm-2000	175
LIM23-DmNm-XXXX	XXXX			Tuyue YWWZZZ LIM23-DmNm-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: 7/16-JB3
Connector right: N-JB3
Cable: LIM141

Electrical data

Impedance	50 Ω
Frequency	DC to 6 GHz
VSWR	≤ 1.30 , DC to 6GHz
Insertion loss	See table available variants
PIM	≤ -165 dBc
RF-leakage	≥ 90 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 30 mm
Multiple: 45 mm
Jacket Diameter: 4.2 mm

Environmental data

Temperature range	-40°C to +85°C
2002/95/EC (RoHS)	compliant