


Cable Assemblies Low Insertion Loss Precision N Male / SMA Male

P49-NmSm-xxxx

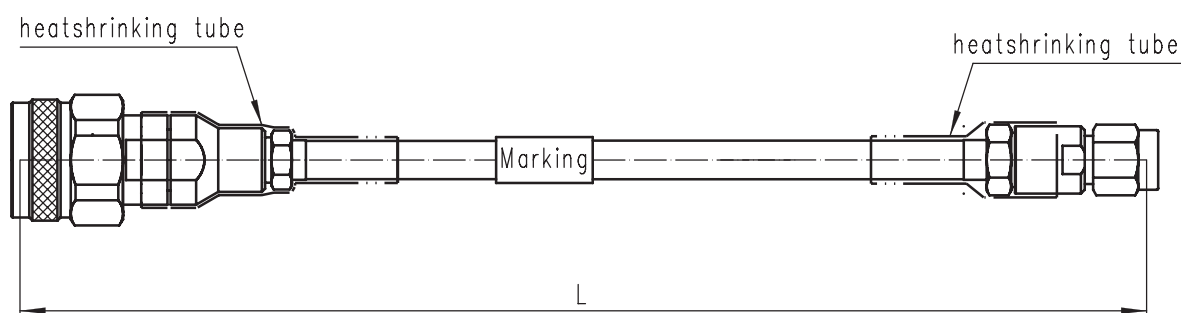

Available Varirants

TYPE	"L"(mm)	IL. dB@max. 18GHz	Marking	Weight (g)
P49-NmSm-500	500	0.69	Tuyue YWWZZZ P49-NmSm-500	76.5
P49-NmSm-1000	1000	1.28	Tuyue YWWZZZ P49-NmSm-1000	109.0
P49-NmSm-2000	2000	2.56	Tuyue YWWZZZ P49-NmSm-2000	174.0
P49-NmSm-XXXX	XXXX		Tuyue YWWZZZ P49-NmSm-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: N-J190G
Connector right: SMA-J190G
Cable: P49

Electrical data

Impedance	50 Ω
Frequency	DC to 18GHz
VSWR	≤ 1.30 DC to 18GHz
Insertion loss	See table available variants
RF-leakage	≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 12.5 mm
Multiple: 38.1 mm
Jacket Diameter: 4.8 mm

Environmental data

Temperature range	-55°C to +165°C
2002/95/EC (RoHS)	compliant

Shanghai Tuyue electronics Co. Ltd.

Tel.: +86 21 64753655 Fax: +86 21 61257270

Email: info@tuyue.com.cn Website:www.tuyue.com.cn