


CONNECTOR SMA Female Panel

SMA-KFD529G

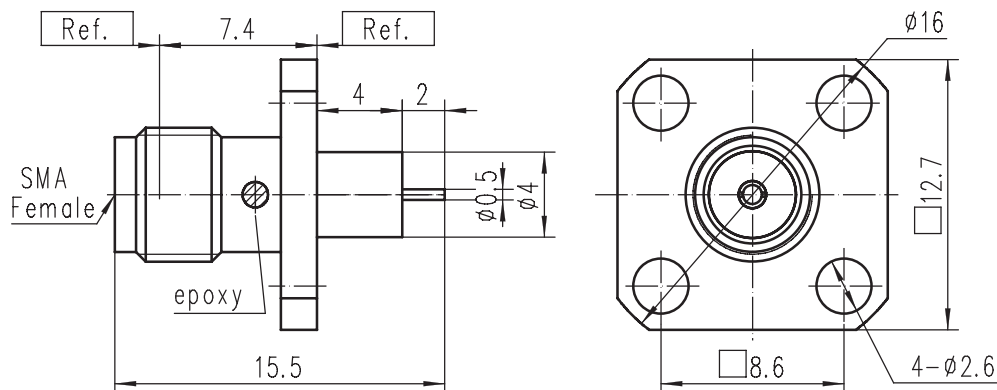

Code : 130607

Electrical data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR	≤ 1.28 , DC-18GHz
Insertion loss	$\leq 0.03 \times \sqrt{f(\text{GHz})}$ dB
Insulation resistance	$\geq 5 \times 10^3 \text{ M}\Omega$
Center contact resistance	$\leq 3 \text{ m}\Omega$
Outer contact resistance	$\leq 2 \text{ m}\Omega$
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling(at 20 °C, sea level, VSWR 1.0)	$\leq 150 \text{ W @ 2 GHz}$
RF-leakage	$\geq 100 \text{ dB up to 1 GHz}$

Mechanical data

Mating cycles	min. 500
Center contact captivation: axial	$\geq 27 \text{ N}$
radial	$\geq 3 \text{ Ncm}$
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Material and plating

Connector parts	Material	Plating
Center contact	CuBe	Gold
Outer contact	Stainless Steel	Passivated
Dielectric	PTFE	

Environmental data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
2002/95/EC (RoHS)	compliant

Shanghai Tuyue electronics Co. Ltd.

Tel.: +86 21 64753655 Fax: +86 21 61257270
Email: info@tuyue.com.cn Website:www.tuyue.com.cn

Page
1 / 1