


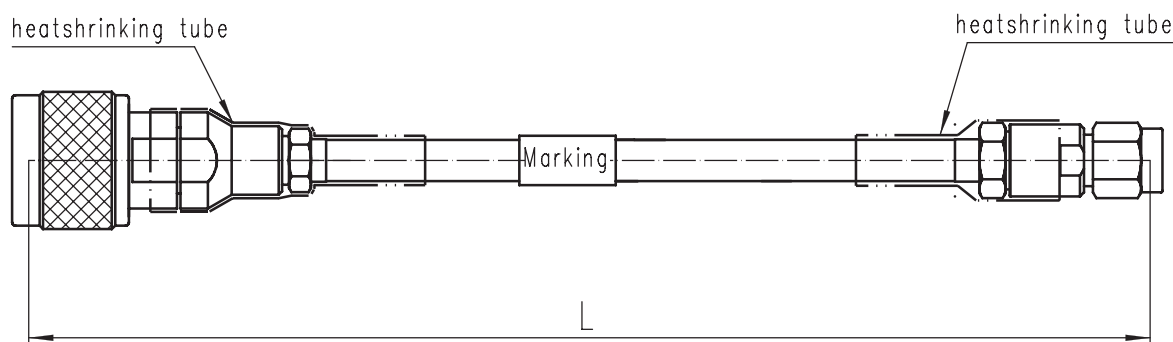

Available Varirants

TYPE	"L"(mm)	IL. dB@max. 18GHz	Marking	Weight (g)
SS218-NmSm-500	500	1.55	Tuyue YWWZZZ SS218-NmSm-500	68.5
SS218-NmSm-1000	1000	2.56	Tuyue YWWZZZ SS218-NmSm-1000	93.0
SS218-NmSm-2000	2000	4.80	Tuyue YWWZZZ SS218-NmSm-2000	142.0
SS218-NmSm-XXXX	XXXX		Tuyue YWWZZZ SS218-NmSm-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: N-J141G
Connector right: SMA-J141G
Cable: SS141

Electrical data

Impedance	50 Ω
Frequency	DC to 18GHz
VSWR	≤1.30 DC to 18GHz
Insertion loss	See table available variants
RF-leakage	≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
Single: 12.5 mm
Multiple: 38.1 mm
Jacket Diameter: 4.01mm

Environmental data

Temperature range -55°C to +125°C
2002/95/EC (RoHS) compliant