
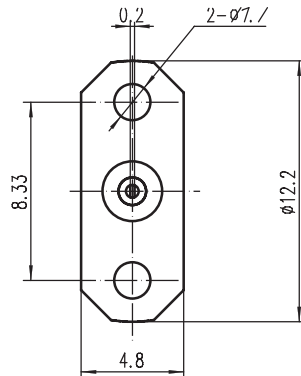


CONNECTOR SSMA Female-Panel

SSMA-KFD1AG

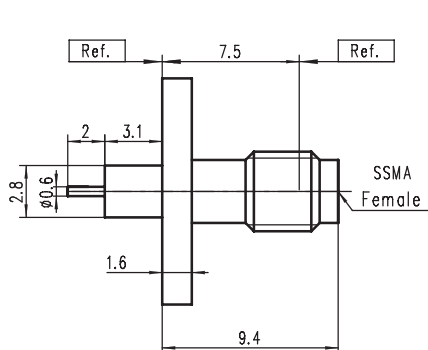

Code : 140004

Electrical data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR	$\leq 1.07 + 0.04 \sqrt{f(\text{GHz})}$
Insulation resistance	$\geq 5000 \text{ M}\Omega$
Center contact resistance	$\leq 5 \text{ m}\Omega$
Outer contact resistance	$\leq 2.5 \text{ m}\Omega$
Test voltage	750 V rms
Working voltage	$\leq 250 \text{ V rms}$

Mechanical data

Mating cycles	min. 500
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Material and plating

Connector parts	Material	Plating
Center contact	CuBe	Gold
Outer contact	Stainless Steel	Passivated
Dielectric	PTFE	

Environmental data

Temperature range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
2002/95/EC (RoHS)	compliant